



**Product
overview**

Frontier™ is a modular acoustic baffle system designed to communicate with interior spaces via an adjustable channel and clip system—giving you complete control over the height, spacing, and placement of each individual component. Lightweight yet solid in appearance, Frontier Acoustic Fins and Raft are made from 100% polyester fibre and cut to form elegant 2D and 3D shapes. Frontier is designed to be ‘tuned’ to interior spaces, offering tailored acoustic absorption across a wide range of frequencies.

Specification

Acoustic absorption system shall be Frontier™ Acoustic Fins () as compiled by Autex www.autexglobal.com

Acoustic absorber Frontier™ Acoustic Fins (2400/custom) mm length x (300 mm nominal/Axis 150 mm) depth x (12/24) mm gauge, spaced at () mm centres. Colour (), sound absorption: 100/200 mm centres Class B, 300 mm centres Class C, Fire rating ISO 9705: Classification: Group 1-S, AS ISO 9705 – 2003 Classification: Group 1, BS EN 13501-1:2018: B - s2, d0.

Supplied with Frontier Connector Clips, Frontier Channel, Frontier Fins. Fix with 6 g countersink fastener appropriate for the substrate. Install as per Frontier Install Instructions.

Colour options

 Falling Water	 Rosada	 Beehive
 Galaxy	 Opera	 Parthenon
 Pinnacle	 Senado	 Sargazo
 Petronas	 Acros	
 Empire	 Bosco	
 Flatiron	 Lotus	
 Savoye	 Tree House	
 Pavilion	 Gherkin	
 Ironbank	 Muralla	
 Zenith	 Cavalier	



Product specifications

Product name	Frontier™ Acoustic Fins
Composition	Fin: 100% polyester fibre (PET); aluminium channel
Fin length	2400 mm
Tolerance	(+/- 0.5 mm)
Thickness	24 mm
Tolerance	(+/- 6%)

Installation

Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website.

Acoustic performance

Frontier Acoustic Fins is specifically designed to reduce and control reverberated noise and echo in building interiors.

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
Frontier 24 mm (300 mm deep 100 mm centres)	0.35	0.70	0.95	1.25	1.35	1.30	1.05
Frontier 24 mm (300 mm deep 200 mm centres)	0.25	0.55	0.70	1.10	1.30	1.30	0.90
Frontier 24 mm (300 mm deep 300 mm centres)	0.20	0.45	0.60	1.00	1.25	1.20	0.85


Table presents the practical sound absorption coefficients as according to ISO 11654. Graph presents third octave sound absorption coefficients (according to ISO 354 measurement of sound absorption in a reverberation room). The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centred on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Sound Absorption Coefficients according to ISO 354. University of Auckland Testing Service

Frontier Fins 24 mm
(300 mm deep 100mm centres) - test no: T1812-4

Frontier Fins 24mm
(300 mm deep @ 200 mm centres) - test no: T1812-5

Frontier Fins 24 mm
(300 mm deep @ 300 mm centres) - test no: T1812-6

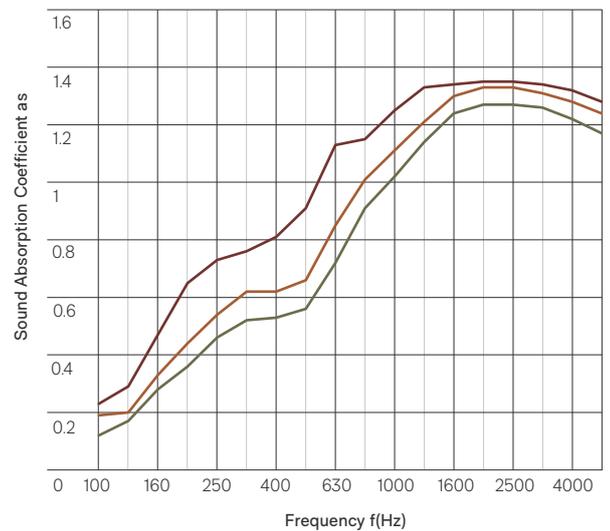

Product specifications

Product name	Frontier™ Acoustic Fins
Composition	Fin: 100% polyester fibre (PET); aluminium channel
Dimensions	Fin length: 2400 mm
Tolerance	(+/- 0.5 mm)
Thickness	12 mm
Tolerance	(+/- 6%)

Installation

Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website.



Acoustic performance

Frontier Acoustic Fins is specifically designed to reduce and control reverberated noise and echo in building interiors.

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
Frontier 12 mm (150 mm deep 100 mm centres)	0.20	0.50	0.75	0.65	0.90	1.05	0.70
Frontier 12 mm (300 mm deep 100 mm centres)	0.30	0.65	0.80	1.20	1.45	1.60	1.00
Frontier 12 mm (300 mm deep 200 mm centres)	0.30	0.60	0.70	1.00	1.30	1.50	0.90
Frontier 12 mm (300 mm deep 300 mm centres)	0.25	0.50	0.60	0.80	1.10	1.25	0.75

Table presents the practical sound absorption coefficients as according to ISO 11654. Graph presents third octave sound absorption coefficients (according to ISO 354 measurement of sound absorption in a reverberation room). The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centred on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.


Sound Absorption Coefficients according to ISO 354. University of Auckland Testing Service

Frontier™ Fins 12 mm
(150 mm deep 100 mm centres) - test no: T1525-11

Frontier™ Fins 12 mm
(300 mm deep @ 100 mm centres) - test no: T1525-18

Frontier™ Fins 12 mm
(300 mm deep @ 200 mm centres) - test no: T1525-16

Frontier™ Fins 12 mm
(300 mm deep @ 300 mm centres) - test no: T1525-17

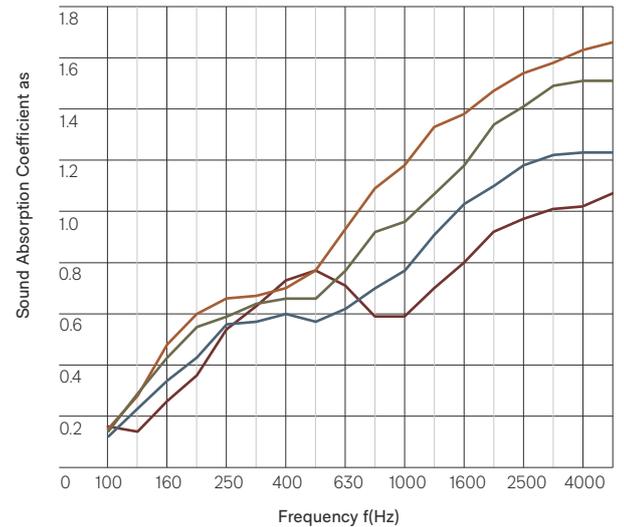

Product specifications

Fire rating

Frontier is made from Cube as the base material. Cube has been evaluated using the following test methods:

ISO 9705: 1993

Classification: Group 1-S
Smoke production rate:
<5.0m²/s
As required by NZBC C/VM2

AS ISO 9705 - 2003

Classification: Group 1
(SMOGR_{arc}): <100m²/s²
Assessed using methodology AS ISO 9705:2003 in accordance with AS 5637:1:2015, as required by BCA Specification C110-4
FI 4974
FAR 4055

BS EN 13501-1:2018

Wall applications
Classification: B-s₂,d₀
(Cube™ 12 mm)
Tested using BS EN ISO 11925-2:2020 and BS EN 13823:2020 and classified in accordance with BS EN 13501-1:2018, as required by BS EN 15102:2007 + A1:2011. EUI-20-000268-A

Ceiling applications
Classification: B-s₂,d₀
(Cube™ 12 mm)

Tested using BS EN ISO 11925-2:2020 and BS EN 13823:2020 and classified in accordance with BS EN 13501-1:2018, as required by BS EN 13964:2014. EUI-20-000268-B

ASTM E-84-15a

Class A, FS:0 - SD:45
(Cube™ 1/2")
RJ4479
Class A, FS:0 - SD:65
(Cube™ 1")
RJ4479

VOC emissions

Autex Acoustics polyester has been tested for chemical emissions in accordance with ASTM D5116 and is considered a low VOC product. VOC concentration: 0.009 mg/m³ (7 days).

Water vapour sorption

ASTM C1104 / C1104M-13a Test conditions: 49°C, 95%RH Water vapour absorbed and adsorped after 4 days: 0.4% by weight.

Microbial resistance

ASTM G21-15 Growth rating: 0 (No growth) Frontier does not promote the growth of mould and mildew.

Colour fastness to light

Frontier is suitable for indoor use only. Light fastness is dependent on use and exposure. Frontier has been evaluated to the following standard: ISO 105-B02:2014
Rating: 6 (Highest = 7)

Colour fastness to rubbing

ISO 105-X12:2016
Dry rating: 4-5 (Highest = 5)
Wet rating: 4-5 (Highest = 5)

Pattern repeat

Non-woven. No pattern repeat but product has directional grain. Product may vary from samples and batch to batch due to fibre blending and lay-up, which is an inherent feature of this product.

Fabric care

Blot spills from fabric quickly. Wipe with a damp cloth. Avoid rubbing and excessive amounts of water as this will affect the finish. Use carpet or upholstery shampoo as directed. Blot with a clean dry cloth after each application of solution.

Custom printed Frontier requires the services of a specialist cleaning company. Refer to the Frontier Care and Maintenance Guide for more information.

Environmental

Autex Acoustics is committed to best practice through our ISO 14001 certified Environmental Management Systems.

Frontier contains a minimum of 60% recycled polyester fibre (from PET bottle-flake). Off-cuts and manufacturing waste is re-used or recycled wherever possible.

Frontier is manufactured from 100% polyester fibre and do not contain formaldehyde binders. Autex Acoustics polyester fibre supports safer indoor air quality and will not become a potential airborne pollutant.

Service

For further information about Frontier, Cube, or any other Autex Acoustics product, please contact your account manager or visit our website.



Light reflectance values by colour

Frontier Acoustic Fins are suitable for indoor use only. LRVs were measured in accordance with BS 8493:2008+A1:2010

Pavilion	80	Galaxy	15
Opera	49	Lotus	14
Savoie	46	Ironbank	13
Senado	45	Cavalier	12
Rosada	44	Muralla	9
Acros	40	Gherkin	8
Falling Water	34	Empire	5
Parthenon	33	Sargazo	4
Beehive	33	Pinnacle	3
Bosco	29	Tree House	3
Flatiron	24	Petronas	2
Zenith	23		

Caring for the environment

Frontier is manufactured using 100% polyester fibre and contains a minimum of 60% recycled fibre (from PET plastics). Our products are designed to be recycled at the end of their life too.

We have continual improvement programmes in which we implement a range of initiatives to mitigate the environmental 'hotspots' that we have identified. Our products are GreenRate Level A, Health Product Declaration (HPD), and CDHP Standard certified.

Frontier is DeclareSM certified to be Red List free and can be used in Living Building Challenge projects. Autex has a high functioning Environmental Management System (ISO 14001) to enhance our environmental performance and contribute to sustainable development.



- **Autex Industries Ltd**
702-718 Rosebank Rd
Private Bag 19988
Avondale 1746, Auckland
New Zealand
Freephone 0800 428 839
Phone +64 9 828 9179
Fax +64 9 828 5810

- **Autex Australia Pty Ltd**
166 Bamfield Road
PO Box 5099
West Heidelberg, Melbourne
VIC 3081, Australia
Freephone 1800 678 160
Phone +61 3 9457 6700
Fax +61 3 9457 1020

- **Autex Acoustics Ltd**
Unit J4, Lowfields Way,
Lowfields Business Park,
Elland, West Yorkshire
Hx5 9Da
United Kingdom
Phone +44 0 1422418899

- **Autex Acoustics LLC**
19350 Van Ness Avenue
Torrance, CA 90501
United States of America
Phone +1 424 203 1813

An ISO 9001, ISO 14001 and ISO 45001 certified company. The brand names and logos mentioned herein are registered or unregistered trademarks either owned or used under license by Autex Industries Limited or other members of the Autex Group. The contents of this document are protected by Copyright 2021 Autex Industries Ltd. All Rights Reserved. It is the user's responsibility to determine if the product and information presented in this document is suitable for the intended application by engaging a suitably qualified consultant. The information contained in this document is correct to the best of our knowledge at the date of its publication. To verify that this document is the most current publication please check our website or contact your Autex account manager.