



**Product
overview**

Horizon™ is a range of floating acoustic panels that create a cloud-like illusion when suspended. Made from 100% polyester fibre, Horizon panels are lightweight yet strong—holding form over their lifetime. Horizon can be installed on ceilings and walls without the need for clear space, as the channels, clips, and suspension wires require limited contact.

Specification

Acoustic panels shall be Horizon () as compiled by Autex www.autexglobal.com

Seismic bracing as per local building code requirements.

Acoustic absorber Horizon (Rectangle 2400 x 1200 mm), (Square 1200 x 1200 mm), (Circle 1200 mm Diam.), (Right Angled Triangles 1159 x 1159 mm), (Oval 2400 x 1200 mm), (Hexagons 1100 mm across the widest point) 24 mm thick. Colour (), Fire Rating ISO 9705: 1993: Group 1-S, AS ISO 9705 – 2003: Group 1, ASTM E-84-15a: Class A, FS:0 - SD:45.

Supplied with Autex attachment, suspension, or direct fix sets; fix with countersunk fastener appropriate for the substrate. Install as per Horizon Install Instructions.

Colour options

	Falling Water		Rosada		Beehive
	Galaxy		Opera		Parthenon
	Pinnacle		Senado		Sargazo
	Petronas		Acros		
	Empire		Bosco		
	Flatiron		Lotus		
	Savoye		Tree House		
	Pavilion		Gherkin		
	Ironbank		Muralla		
	Zenith		Cavalier		



Product specifications

Product name	Horizon™ Oval
Composition	100% polyester fibre
Panel dimensions	1200 mm x 2400 mm
Tolerance	(+/- 0.5 mm) (+/- 0.5 mm)
Thickness	24 mm
Tolerance	(+/- 6%)
Weight	3600 gsm

Installation

Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website www.autexglobal.com

In situations where product is being installed near fire protection systems (e.g. sprinklers or fire alarms) relevant building codes, standards and design rules must be adhered to. Please consult the project engineer and relevant expert such as a fire protection engineer.

Acoustic performance


Horizon Oval is specifically designed to reduce and control reverberated noise and echo in building interiors.

Frequency (Hz)	125	250	500	1000	2000	4000	Per unit
● Horizon Oval (Fixed on clips)	0.3	1.0	2.4	3.3	3.3	3.2	2.5
● Horizon Oval (24 mm suspended 200 mm)	0.8	2.1	2.9	3.3	3.8	3.9	3.0
● Horizon Oval (24 mm suspended 400 mm)	1.4	2.0	2.7	3.7	4.3	4.4	3.1
● Horizon Oval (24 mm suspended 800 mm)	1.1	1.7	2.8	4.1	4.8	4.8	3.4

All results are reported in metric sabin - per unit. Equivalent sound absorption area according to ISO 354 measurement of sound absorption in a reverberation room. Average absorption (sabins per unit) calculated at one-third octave bands centred on 250 Hz, 500 Hz, 1000 Hz, and 2000 Hz, and rounded to the nearest 0.05.

Sound Absorption Coefficients according to ISO 354. University of Auckland Testing Service

Horizon Oval direct fixed on clips - Test No: T1805-1
 Horizon Oval suspended 200 mm - Test No: T1805-22
 Horizon Oval suspended 400 mm - Test No: T1805-21
 Horizon Oval suspended 800 mm - Test No: T1805-11

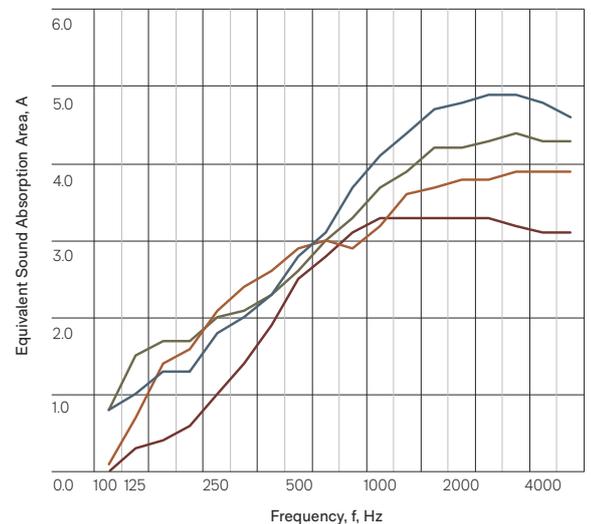

Product specifications

Product name	Horizon™ Rectangle
Composition	100% polyester fibre
Panel dimensions	1200 mm x 2400 mm
Tolerance	(+/- 0.5 mm) (+/- 0.5 mm)
Thickness	24 mm
Tolerance	(+/- 6%)
Weight	3600 gsm

Installation

Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website www.autexglobal.com

In situations where product is being installed near fire protection systems (e.g. sprinklers or fire alarms) relevant building codes, standards and design rules must be adhered to. Please consult the project engineer and relevant expert such as a fire protection engineer.



Acoustic performance


Horizon Rectangle is specifically designed to reduce and control reverberated noise and echo in building interiors.

Frequency (Hz)	125	250	500	1000	2000	4000	Per unit
Horizon Rectangle (Fixed on clips)	0.3	1.0	2.4	3.3	3.3	3.2	2.5
Horizon Rectangle (24 mm suspended 200 mm)	0.8	2.1	2.9	3.3	3.8	3.9	3.0
Horizon Rectangle (24 mm suspended 400 mm)	1.4	2.0	2.7	3.7	4.3	4.4	3.1
Horizon Rectangle (24 mm suspended 800 mm)	1.1	1.7	2.8	4.1	4.8	4.8	3.4

All results are reported in metric sabin - per unit. Equivalent sound absorption area according to ISO 354 measurement of sound absorption in a reverberation room. Average absorption (sabins per unit) calculated at one-third octave bands centred on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Sound Absorption Coefficients according to ISO 354. University of Auckland Testing Service

Horizon Rectangle direct fixed on clips - Test No: T1805-1
Horizon Rectangle suspended 200 mm - Test No: T1805-22
Horizon Rectangle suspended 400 mm - Test No: T1805-21
Horizon Rectangle suspended 800 mm - Test No: T1805-11

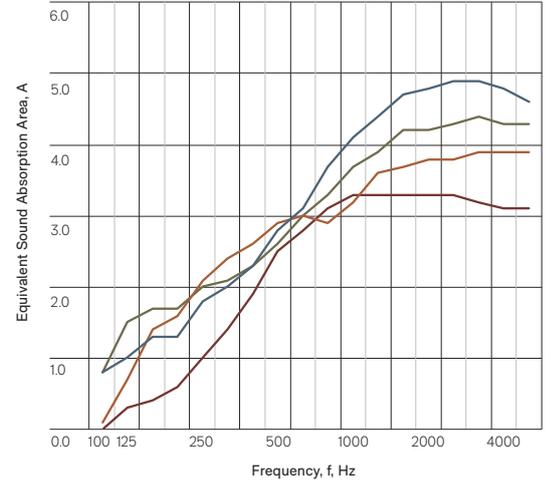

Product specifications

Product name	Horizon™ Square
Composition	100% polyester fibre
Panel dimensions	1200 mm x 1200 mm
Tolerance	(+/- 0.5 mm) (+/- 0.5 mm)
Thickness	24 mm
Tolerance	(+/- 6%)
Weight	3600 gsm

Installation

Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website www.autexglobal.com

In situations where product is being installed near fire protection systems (e.g. sprinklers or fire alarms) relevant building codes, standards and design rules must be adhered to. Please consult the project engineer and relevant expert such as a fire protection engineer.

Acoustic performance


Horizon Square is specifically designed to reduce and control reverberated noise and echo in building interiors.

Frequency (Hz)	125	250	500	1000	2000	4000	Per unit
Horizon Square (Fixed on clips)	0.2	1.5	1.3	1.7	1.7	1.6	1.3
Horizon Square (24 mm suspended 200 mm)	0.2	1	1.5	1.7	2.1	2.1	1.6
Horizon Square (24 mm suspended 400 mm)	0.5	1	1.3	1.8	2.2	2.3	1.6
Horizon Square (24 mm suspended 800 mm)	0.7	0.8	1.4	2.1	2.5	2.4	1.7

All results are reported in metric sabin - per unit. Equivalent sound absorption area according to ISO 354 measurement of sound absorption in a reverberation room. Average absorption (sabins per unit) calculated at one-third octave bands centred on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz, and rounded to the nearest 0.05.

Sound Absorption Coefficients according to ISO 354. University of Auckland Testing Service

Horizon Square direct fixed on clips - Test No: T1805-2
Horizon Square suspended 200 mm - Test No: T1805-14
Horizon Square suspended 400 mm - Test No: T1805-13
Horizon Square suspended 800 mm - Test No: T1805-12

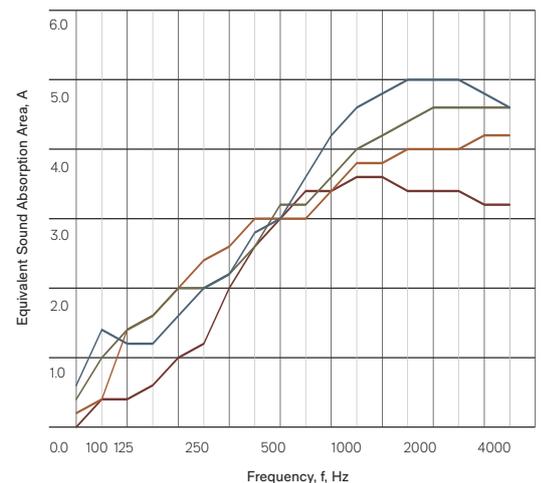



Product specifications

Product name	Horizon™ Right Angle Triangle
Composition	100% polyester fibre
Panel dimensions	1159 mm x 1159 mm
Tolerance	(+/- 0.5 mm) (+/- 0.5 mm)
Thickness	24 mm
Tolerance	(+/- 6%)
Weight	3600 gsm

Installation

Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website www.autexglobal.com

In situations where product is being installed near fire protection systems (e.g. sprinklers or fire alarms) relevant building codes, standards and design rules must be adhered to. Please consult the project engineer and relevant expert such as a fire protection engineer.

Acoustic performance


Horizon Right Angle Triangle is specifically designed to reduce and control reverberated noise and echo in building interiors.

	Frequency (Hz)	125	250	500	1000	2000	4000	Per unit
●	Horizon Right Angle Triangle (Fixed on clips)	0.1	0.2	0.6	1.0	1.0	0.9	0.7
●	Horizon Right Angle Triangle (24 mm suspended 200 mm)	0.1	0.5	0.7	0.8	1	1.1	0.8
●	Horizon Right Angle Triangle (24 mm suspended 400 mm)	0.1	0.5	0.6	0.9	1.1	1.2	0.8
●	Horizon Right Angle Triangle (24 mm suspended 800 mm)	0.2	0.3	0.7	1.0	1.2	1.2	0.8

All results are reported in metric sabin - per unit. Equivalent sound absorption area according to ISO 354 measurement of sound absorption in a reverberation room. Average absorption (sabins per unit) calculated at one-third octave bands centred on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Sound Absorption Coefficients according to ISO 354. University of Auckland Testing Service

Horizon Right Angle Triangle direct fixed on clips - Test No: T1805-3
 Horizon Right Angle Triangle suspended 200 mm - Test No: T1805-19
 Horizon Right Angle Triangle suspended 400 mm - Test No: T1805-20
 Horizon Right Angle Triangle suspended 800 mm - Test No: T1805-10

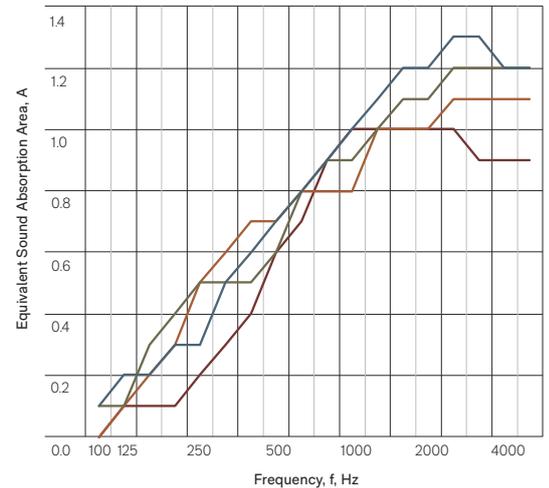

Product specifications

Product name	Horizon™ Circle
Composition	100% polyester fibre
Panel dimensions	1200 mm diam.
Tolerance	(+/- 0.5 mm)
Thickness	24 mm
Tolerance	(+/- 6%)
Weight	3600 gsm

Installation

Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website www.autexglobal.com

In situations where product is being installed near fire protection systems (e.g. sprinklers or fire alarms) relevant building codes, standards and design rules must be adhered to. Please consult the project engineer and relevant expert such as a fire protection engineer.



Acoustic performance


Horizon Circle is specifically designed to reduce and control reverberated noise and echo in building interiors.

Frequency (Hz)	125	250	500	1000	2000	4000	Per unit
● Horizon Circle (Fixed on clips)	0.1	0.4	1.0	1.3	1.4	1.3	1.0
● Horizon Circle (24 mm suspended 200 mm)	0.2	0.8	1.2	1.3	1.6	1.6	1.2
● Horizon Circle (24 mm suspended 400 mm)	0.4	0.8	1.1	1.5	1.8	1.8	1.3
● Horizon Circle (24 mm suspended 800 mm)	0.4	0.6	1.1	1.6	1.9	1.9	1.3

All results are reported in metric sabin - per unit. Equivalent sound absorption area according to ISO 354 measurement of sound absorption in a reverberation room. Average absorption (sabins per unit) calculated at one-third octave bands centred on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Sound Absorption Coefficients according to ISO 354. University of Auckland Testing Service

Horizon Circle direct fixed on clips - Test No: T1805-5
Horizon Circle suspended 200 mm - Test No: T1805-15
Horizon Circle suspended 400 mm - Test No: T1805-16
Horizon Circle suspended 800 mm - Test No: T1805-9

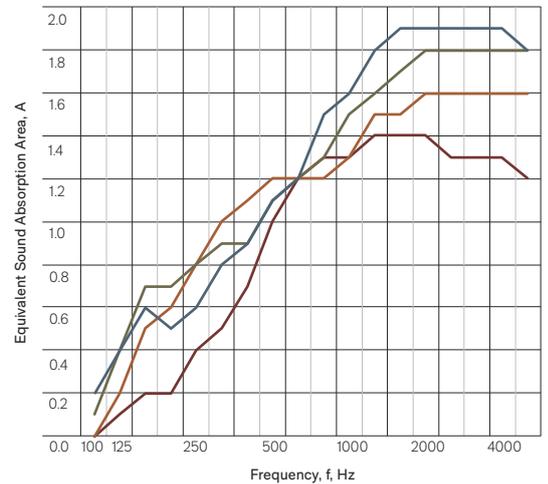

Product specifications

Product name	Horizon™ Hexagon
Composition	100% polyester fibre
Panel dimensions	1100 mm across the widest point
Tolerance	(+/- 0.5 mm)
Thickness	24 mm
Tolerance	(+/- 6%)
Weight	3600 gsm

Installation

Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website www.autexglobal.com

In situations where product is being installed near fire protection systems (e.g. sprinklers or fire alarms) relevant building codes, standards and design rules must be adhered to. Please consult the project engineer and relevant expert such as a fire protection engineer.

Acoustic performance


Horizon Hexagon is specifically designed to reduce and control reverberated noise and echo in building interiors.

Frequency (Hz)	125	250	500	1000	2000	4000	Per unit
● Horizon Hexagon (Fixed on clips)	0.1	0.4	0.8	1.0	1.1	1.0	0.8
● Horizon Hexagon (24 mm suspended 200 mm)	0.1	0.5	0.7	0.9	1.1	1.2	0.8
● Horizon Hexagon (24 mm suspended 400 mm)	0.2	0.4	0.7	1.0	1.3	1.3	0.9
● Horizon Hexagon (24 mm suspended 800 mm)	0.2	0.4	0.7	1.1	1.4	1.4	0.9

All results are reported in metric sabin - per unit. Equivalent sound absorption area according to ISO 354 measurement of sound absorption in a reverberation room. Average absorption (sabins per unit) calculated at one-third octave bands centred on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Sound Absorption Coefficients according to ISO 354. University of Auckland Testing Service

Horizon Hexagon direct fixed on clips - Test No: T1805-4
Horizon Hexagon suspended 200 mm - Test No: T1805-18
Horizon Hexagon suspended 400 mm - Test No: T1805-17
Horizon Hexagon suspended 800 mm - Test No: T1805-8

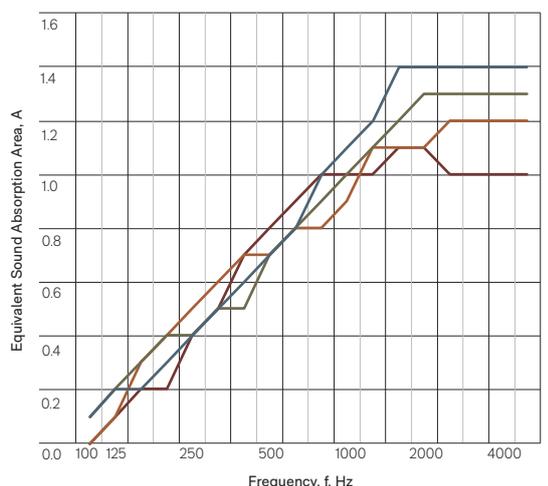



Product specifications

Fire ratings

Horizon is made from Cube™ as the base material. Cube has been evaluated using the following test methods

ISO 9705: 1993

Classification: Group 1-S

Smoke production rate:

<5.0m²/s

As required by NZBC C/VM2

AS ISO 9705 - 2003

Australian Group Number:

Group 1 (SMOGRARC):

less than 100m²/s²

Tested using methodology AS ISO 9705:2003 in accordance with AS 5637:2015, as required by BCA Specification C110-4. FAR 4055

ASTM E-84-15a

Class A, FS:0 - SD:65

RJ4479

VOC emissions

Autex polyester has been tested for chemical emissions in accordance with ASTM D5116 and is considered a low VOC product. VOC concentration: 0.009 mg/m³ (7 days)

Water vapour sorption

ASTM C1104 / C1104M-13a

Test conditions: 49°C, 95%RH

Water vapour absorbed and adsorped after 4 days:

0.4% by weight

Microbial resistance

ASTM G21-15

Growth rating: 0 (No growth)

Horizon does not promote the growth of moulds and mildew.

Colour fastness to light

Horizon is suitable for indoor

use only. Light fastness

is dependent on use and

exposure. Horizon has

been evaluated to the

following standard:

ISO 105-B02:2014

Rating: 6 (Highest = 7)

Mechanical testing

To support the load and

seismic calculations of

your project's design, we

have undertaken extensive

destructive testing of Autex

ceiling system components.

For detailed mechanical testing

information please contact your

account manager.

Colour fastness to rubbing

ISO 105-X12:2016

Dry rating: 4-5 (Highest = 5)

Wet rating: 4-5 (Highest = 5)

Pattern repeat

Non-woven. No pattern repeat, but product has directional grain. Product may vary from samples and batch to batch due to fibre blending and lay-up, which is an inherent feature of this product.

Fabric care

Blot spills from fabric quickly.

Wipe with a damp cloth.

Avoid rubbing and excessive

amounts of water as this will

affect the finish. Use carpet

or upholstery shampoo

as directed.

Blot with a clean dry cloth

after each application of

solution. Custom printed

Horizon requires the services

of a specialist cleaning

company. Refer to the Horizon

Care and Maintenance Guide

for more information.

Environmental

Autex Acoustics is committed to

best practice through our ISO

14001 certified Environmental

Management Systems.

Horizon contains a minimum of 60% previously recycled polyester fibre (from PET bottle-flake). Off-cuts and manufacturing waste are re-used or recycled wherever possible.

Horizon is manufactured from 100% polyester fibre and does not contain formaldehyde binders. Autex Acoustics polyester fibre supports safer indoor air quality and will not become a potential airborne pollutant.

Service

For further information about Horizon, please contact your account manager or visit our website.

Light reflectance values by colour

Horizon is suitable for indoor use only. LRVs were measured in accordance with BS 8493:2008+A1:2010

Pavilion	80	Galaxy	15
Opera	49	Lotus	14
Savoye	46	Ironbank	13
Senado	45	Cavalier	12
Rosada	44	Muralla	9
Acros	40	Gherkin	8
Falling Water	34	Empire	5
Parthenon	33	Sargazo	4
Beehive	33	Pinnacle	3
Bosco	29	Tree House	3
Flatiron	24	Petronas	2
Zenith	23		



Caring for the environment

Horizon is manufactured using 100% polyester fibre and contains a minimum of 60% recycled fibre (from PET plastics). Our products are designed to be recycled at the end of their life too.

We have continual improvement programmes in which we implement a range of initiatives to mitigate the environmental 'hotspots' that we have identified. Our products are GreenRate Level A, Health Product Declaration (HPD), and CDHP Standard certified.

Horizon is made from Cube which is DeclareSM certified to be Red List free and can be used in Living Building Challenge projects. Autex has a high functioning Environmental Management System (ISO 14001) to enhance our environmental performance and contribute to sustainable development.



Declare.



● **Autex Industries Ltd**
702-718 Rosebank Rd
Private Bag 19988
Avondale 1746, Auckland
New Zealand
Freephone 0800 428 839
Phone +64 9 828 9179
Fax +64 9 828 5810

● **Autex Australia Pty Ltd**
166 Bamfield Road
PO Box 5099
West Heidelberg, Melbourne
VIC 3081, Australia
Freephone 1800 678 160
Phone +61 3 9457 6700
Fax +61 3 9457 1020

● **Autex Acoustics Ltd**
Unit J4, Lowfields Way,
Lowfields Business Park,
Elland, West Yorkshire
Hx5 9Da
United Kingdom
Phone +44 0 1422418899

● **Autex Acoustics LLC**
19350 Van Ness Avenue
Torrance, CA 90501
United States of America
Phone +1 424 203 1813

An ISO 9001, ISO 14001 and ISO 45001 certified company. The brand names and logos mentioned herein are registered or unregistered trademarks either owned or used under license by Autex Industries Limited or other members of the Autex Group. The contents of this document are protected by Copyright 2021 Autex Industries Ltd. All Rights Reserved. It is the user's responsibility to determine if the product and information presented in this document is suitable for the intended application by engaging a suitably qualified consultant. The information contained in this document is correct to the best of our knowledge at the date of its publication. To verify that this document is the most current publication please check our website or contact your Autex account manager.